



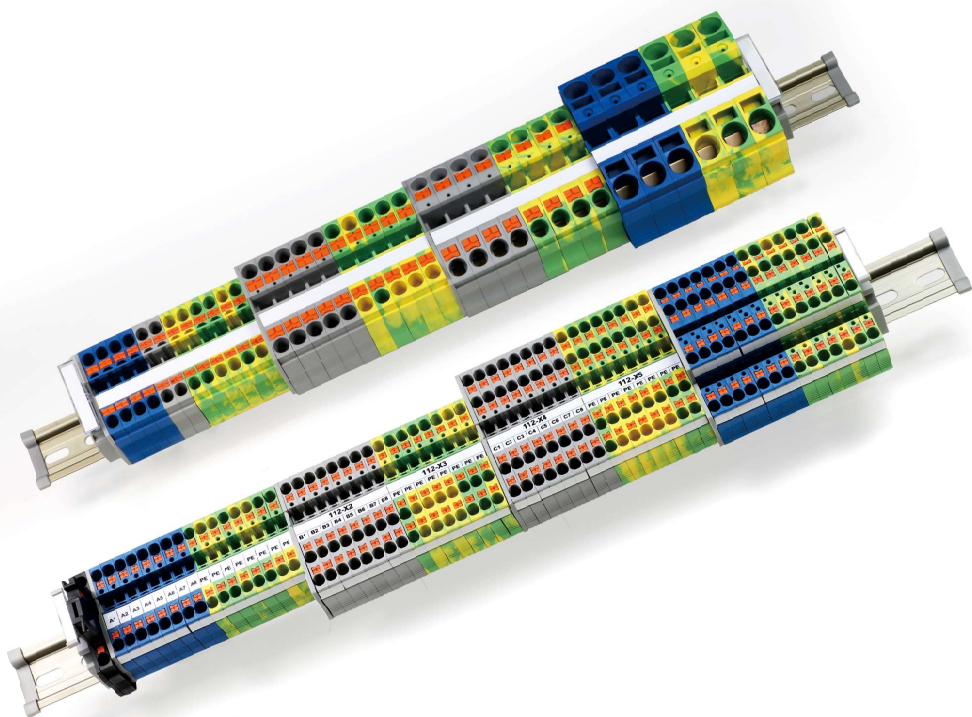

Push-in terminal block

Easier wiring

Terminal block
UJ6-1.5



Terminal block
UJ6-2.5




Terminal block
UJ6-4



Dimensions							
Width/Thickness/Height	(mm)	45,2 / 3,5 / 30,5		48,5 / 5,2 / 35,2		55,8 / 6,2 / 35,2	
Stripping length	(mm)	11		11		13	
Technical data							
Voltage	(V)	500		800		800	
Current	(A)	17,5		24		32	
Cross section	(mm²)	1,5		2,5		4	
Connection capacity							
Solid conductors	(mm²)			0,2-4		0,2-6	
Stranded conductors	(mm²)	0,2-1,5		0,2-2,5		0,2-4	
Terminal block	Type	Order No	Type	Order No	Type	Order No	
	UJ6-1,5	421482	UJ6-2,5	421456	UJ6-4	421457	
Mounting rail							
Can be installed on the	TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001	
	TH35-15	102005	TH35-15	102005	TH35-15	102005	
End cover							
For electrical isolation in the end of terminal blocks	UJ6-1,5G	422163	UJ6-2,5G	422106	UJ6-4G	422107	
Group end cover							
For visual and electrical isolation in the terminal blocks			UJ5-1,5 – 4FG	422016	UJ5-1,5 – 4FG	422016	
Test accessories							
Test plug, both used together, for circuit testing	PS-2	016022	PS-2	016022	PS-2	016022	
Push-in jumpers							
Can be push into center of the terminal to achieve the terminals connection	2-pos 3-pos 4-pos 5-pos 10-pos 20-pos 30-pos	UFBS 2-3,5 UFBS 3-3,5 UFBS 4-3,5 UFBS 5-3,5 UFBS 10-3,5	423050 423051 423052 423053 423049	UFBS 2-5 UFBS 3-5 UFBS 4-5 UFBS 5-5 UFBS 10-5 UFBS 20-5 UFBS 30-5	423006 423007 423008 423009 423010 423028 423029	UFBS 2-6 UFBS 3-6 UFBS 4-6 UFBS 5-6 UFBS 10-6	423011 423012 423013 423014 423015
Marker strip							
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements.	Blank Horizontally Vertically	UZB3,5T(Blank) Centre UZB3,5T(Horizontally) UZB3,5T(Vertical)	014593 014597 014598	UZB 5(Blank) UZB 5(Horizontally) UZB 5(Vertical)	014001 014005 014006	UZB 6(Blank) UZB 6(Horizontally) UZB 6(Vertical)	014002 014007 014008
		UBFM 3,5T(Blank)	014599	UBFM 5(Blank)	424004	UBFM 6(Blank)	424007
		Sides UBFM 3,5T(Horizontally) UBFM 3,5T(Vertical)	014600 014601	UBFM 5(Horizontally) UBFM 5(Vertical)	424005 424006	UBFM 6(Horizontally) UBFM 6(Vertical)	424008 424009
Marker strip							
Marker strip for the combination of terminals	UTD-ZB	394006	UTD-ZB	394006	UTD-ZB	394006	
Screwdriver							
	YB 0,4 × 2,5	304001	YB 0,6 × 3,5	304002	YB 0,6 × 3,5	304002	
End socket							
Insulated cord end terminal	E 1008	241209	E2508	241215	E4010	241254	
Bare cord end terminal	EN1508	241305					

UJ6 series push in terminal block

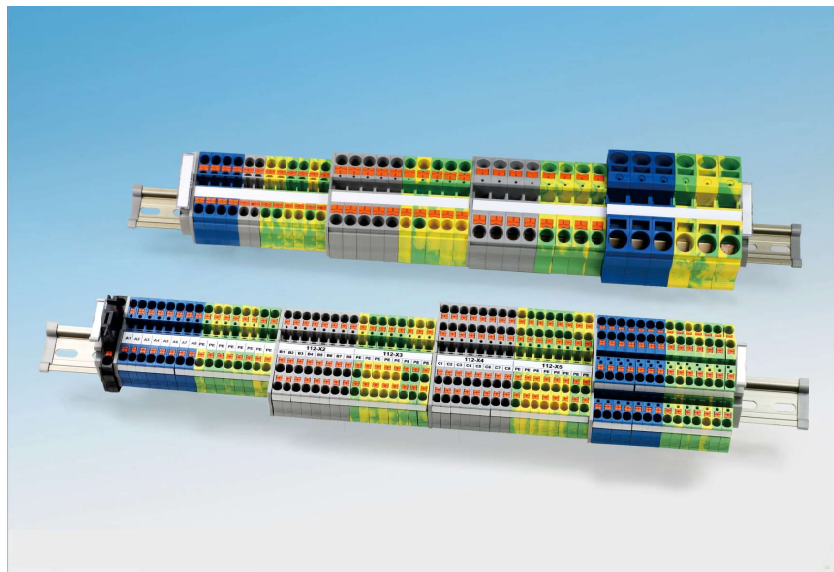

The conductor is aimed at the hole



Plug it easily



The conductor will be free easily with a screwdriver

Profile :


UJ6 series products are the newest terminal blocks researched by Shanghai UPUN Electric (Group) Co., Ltd. It's so easy to plug wires in for the special spring which will lock wires and conductors automatically. And it will be free once the release button was pressed. Being easy to connect & free wires, safety & stable, anti-seismic and maintenance-free are the advantages of them. UJ6 series wiring specifications range from 1.5mm² to 35mm², with complete product types and specifications, including ground type, double-level, 3 connections, 4 connections and fuse type, etc.. It is suitable for wiring in all areas, especially for vibration. The product possesses a number of national patents.

Features

1. Quick plug technology is applied to connect rapid wires;
2. It is easy to release conductor without special tool;
3. Full accessories: standardized bridging, testing and identification of conductors for direct connection.

Easy to connect: a solid conductor or stranded conductor with a terminal is plugged into the hole. The contact spring will be open automatically and the conductor will be locked tightly.

Terminal block
UJ6-35



CE RoHS

92/16,2/58,6
24
1000
125
35
6-35
6-35

Type	Order No
UJ6-35	421518
TH35-7,5	102001
TH35-15	102005


with cover,no need for end cover

PS-2	016022
UFBS 2-16	423023

UZB 10 (Blank)	014004
UZB 10(Horizontally)	014011
UZB 10(Vertical)	014012
UBFM 8 (Blank)	424010
UBFM 8(Horizontally)	424011
UBFM 8(Vertical)	424012
UTD-ZB	394006
YB 1,0×5,0	304004
E35-20	241272

UJ6 series push in terminal block

Terminal block
UJ6-6



UL US CE RoHS

Terminal block
UJ6-10



UL US CE RoHS

Terminal block
UJ6-16



UL US CE RoHS

Dimensions		UL US CE RoHS		UL US CE RoHS		UL US CE RoHS			
Width/Thickness/Height	(mm)	60 / 8,2 / 42,2		67,7 / 10,2 / 49,6		74 / 12,2 / 50,6			
Stripping length	(mm)	16		17		22			
Technical data									
Voltage	(V)	1000		1000		1000			
Current	(A)	41		57		76			
Cross section	(mm²)	6		10		16			
Connection capacity									
Solid conductors	(mm²)	0,5-10		1,5-16		1,5-25			
Stranded conductors	(mm²)	0,5-6		1,5-10		1,5-16			
Terminal block		Type	Order No	Type	Order No	Type	Order No		
		UJ6-6	421458	UJ6-10	421510	UJ6-16	421514		
Mounting rail									
Can be installed on the rail		TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001		
		TH35-15	102005	TH35-15	102005	TH35-15	102005		
End cover									
For electrical isolation in the end of terminal blocks.		UJ6-6G	422108	UJ6-10G	422120	UJ6-16G	422122		
Group end cover									
For visual and electrical isolation in the terminal blocks		UJ5-6FG	422017						
Test accessories									
Test plug, both used together, for circuit testing		PS-2	016022	PS-2	016022	PS-2	016022		
Push-in jumpers									
Can be push into center of the terminal to achieve the terminals connection		2-pos	UFBS 2-8	423016	UFBS 2-10	423021	UFBS 2-12	423022	
		3-pos	UFBS 3-8	423017					
		4-pos	UFBS 4-8	423018					
		5-pos	UFBS 5-8	423019					
		10-pos	UFBS 10-8	423020					
		20-pos							
		30-pos							
Marker strip									
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements.	Blank	UZB 8 (Blank)		014003	UZB 10 (Blank)		014004	014004	
	Horizontally	Centre UZB 8 (Horizontally)		014009	UZB 10 (Horizontally)		014011	014011	
	Vertically	UZB 8 (Vertical)		014010	UZB 10 (Vertical)		014012	014012	
		UBFM 8 (Blank)		424010	UBFM 8 (Blank)		424010	424010	
		Sides UBFM 8 (Horizontally)		424011	UBFM 8 (Horizontally)		424011	424011	
		UBFM 8 (Vertical)		424012	UBFM 8 (Vertical)		424012	424012	
Marker strip									
Marker strip for the combination of terminals		UTD-ZB		394006	UTD-ZB		394006	394006	
Screwdriver									
YB 0,6 x 4,0		304003		YB 1,0 x 5,0		304004			
End socket									
Insulated cord end terminal			E6012	241221	E10-12	241211	E16-18	241226	

Ground terminal block
UJ6-6JD



US CE RoHS

60 / 8,2 / 42,2

16

--

6

0,5-10
0,5-6

Ground terminal block
UJ6-10JD



US CE RoHS

67,7/10,2/49,6

17

--

10

1,5-16
1,5-10

Ground terminal block
UJ6-16JD



US CE RoHS

74/12,2/50,6

22

--

16

1,5-25
1,5-16

Ground terminal block
UJ6-35JD



CE RoHS

92/16,2/58,6

24

--

35

6-35
6-35

Type	Order No	Type	Order No	Type	Order No	Type	Order No
------	----------	------	----------	------	----------	------	----------

UJ6-6JD	421470	UJ6-10JD	421511	UJ6-16JD	421515	UJ6-35JD	421519
---------	--------	----------	--------	----------	--------	----------	--------

--	--	--	--	--	--	--	--

TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001
----------	--------	----------	--------	----------	--------	----------	--------

TH35-15	102005	TH35-15	102005	TH35-15	102005	TH35-15	102005
---------	--------	---------	--------	---------	--------	---------	--------

--	--	--	--	--	--	--	--

UJ6-6G	422108	UJ6-10G	422120	UJ6-16G	422122	with cover,no need for end cover	
--------	--------	---------	--------	---------	--------	----------------------------------	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

		UFBS 2-10	423021	UFBS 2-12	423022	UFBS 2-16	423023
--	--	-----------	--------	-----------	--------	-----------	--------

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

--	--	--	--	--	--	--	--

UZH 8(Blank)	014003	UZH 10(Blank)	014004	UZH 10(Blank)	014004	UZH 10(Blank)	014004
--------------	--------	---------------	--------	---------------	--------	---------------	--------

UZH 8(Horizontally)	014009	UZH 10(Horizontally)	014011	UZH 10(Horizontally)	014011	UZH 10(Horizontally)	014011
---------------------	--------	----------------------	--------	----------------------	--------	----------------------	--------

UZH 8(Vertical)	014010	UZH 10(Vertical)	014012	UZH 10(Vertical)	014012	UZH 10(Vertical)	014012
-----------------	--------	------------------	--------	------------------	--------	------------------	--------

UBFM 8(Blank)	424010	UBFM 8(Blank)	424010	UBFM 8(Blank)	424010	UBFM 8(Blank)	424010
---------------	--------	---------------	--------	---------------	--------	---------------	--------

UBFM 8(Horizontally)	424011	UBFM 8(Horizontally)	424011	UBFM 8(Horizontally)	424011	UBFM 8(Horizontally)	424011
----------------------	--------	----------------------	--------	----------------------	--------	----------------------	--------

UBFM 8(Vertical)	424012	UBFM 8(Vertical)	424012	UBFM 8(Vertical)	424012	UBFM 8(Vertical)	424012
------------------	--------	------------------	--------	------------------	--------	------------------	--------

--	--	--	--	--	--	--	--

UTD-ZB	394006	UTD-ZB	394006	UTD-ZB	394006	UTD-ZB	394006
--------	--------	--------	--------	--------	--------	--------	--------

YB 0,6×4,0	304003	YB 1,0×5,0	304004	YB 1,0×5,0	304004	YB 1,0×5,0	304004
------------	--------	------------	--------	------------	--------	------------	--------


--	--	--	--	--	--	--	--

E6012	241212	E10-12	241211	E16-18	241226	E35-20	241272
-------	--------	--------	--------	--------	--------	--------	--------


--	--	--	--	--	--	--	--

UJ6 series push in terminal block

Ground terminal block
UJ6-1.5JD



Ground terminal block
UJ6-2.5JD



Ground terminal block
UJ6-4JD



CE RoHS		UL US CE RoHS		UL US CE RoHS	
Dimensions					
Width/Thickness/Height	(mm)	46,2 / 3,5 / 30,5		48,5 / 5,2 / 35,2	
Stripping length	(mm)			11	
Technical data					
Voltage	(V)				
Current	(A)				
Cross section	(mm²)	1.5		2.5	
Connection capacity					
Solid conductors	(mm²)			0,2-4	
Stranded conductors	(mm²)	0,2-1.5		0,2-2,5	
Terminal block		Type	Order No	Type	Order No
		UJ6-1,5JD	421483	UJ6-2,5JD	421462
				UJ6-4JD	421469
Mounting rail					
Can be installed on the rail		TH35-7,5	102001	TH35-7,5	102001
		TH35-15	102005	TH35-15	102005
				TH35-15	102005
End cover					
For electrical isolation in the end of terminal blocks.		UJ6-1,5G	422163	UJ6-2,5G	422106
				UJ6-4G	422107
Test accessories					
Test plug, both used together, for circuit testing		PS-2	016022		
Push-in jumpers					
Can be push into center of the terminal to achieve the terminals connection	2-pos	UFBS 2-3,5	423050	UFBS 2-5	423006
	3-pos	UFBS 3-3,5	423051	UFBS 3-5	423007
	4-pos	UFBS 4-3,5	423052	UFBS 4-5	423008
	5-pos	UFBS 5-3,5	423053	UFBS 5-5	423009
	10-pos	UFBS 10-3,5	423049	UFBS 10-5	423010
	20-pos			UFBS 20-5	423028
	30-pos			UFBS 30-5	423029
Marker strip					
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements.	Blank	UZB3,5T (Blank)	014593	UZB 5 (Blank)	014001
	Horizontally	UZB3,5T (Horizontally)	014597	UZB 5 (Horizontally)	014005
	Vertically	Centre UZB3,5T (Vertical)	014598	UZB 5-10 (Vertical)	014006
		UBFM 3,5T (Blank)	014599	UBFM 5 (Blank)	424004
		UBFM 3,5T (Horizontally)	014600	UBFM 5 (Horizontally)	424005
		Sides UBFM 3,5T (Vertical)	014601	UBFM 5 (Vertical)	424006
Marker strip					
Marker strip for the combination of terminals		UTD-ZB	394006	UTD-ZB	394006
Screwdriver					
		YB 0,4 x 2,5	304001	YB 0,6 x 3,5	304002
End socket					
Insulated cord end terminal		E1008	241209	E2508	241215
Bare cord end terminal		EN1508	241305	E4010	241254

Dissection type terminal block
UJ6-4FD




CE RoHS

59/6,2/35,2
16
500
20
4
0,2-6
0,2-4

Type	Order No
UJ6-4FD	421500
TH35-7,5	102001
TH35-15	102005
UJ6-4SKG	422124
PS-2	016022
UFBS 2-6	423011
UFBS 3-6	423012
UFBS 4-6	423013
UFBS 5-6	423014
UFBS 10-6	423015
UBFM 6(Blank)	424007
UBFM 6(Horizontally)	424008
UBFM 6(Vertical)	424009
UTD-ZB	394006
YB 0,6×3,5	304002
E4010	241254

Terminal block with 3 connections
UJ6-1.5/1×2




CE RoHS

54 / 3,5 / 30,5
11
500
17,5
1,5
0,2-1,5

Type	Order No
UJ6-1.5/1×2	421484
UJ6-1.5/1×2(BU)	421779
TH35-7,5	102001
TH35-15	102005
UJ6-1.5/1×2G	422164
PS-2	016022
UFBS 2-3,5	423050
UFBS 3-3,5	423051
UFBS 4-3,5	423052
UFBS 5-3,5	423053
UFBS 10-3,5	423049
UBFM 3,5T(Blank)	014593
UBFM 3,5T(Horizontally)	014597
UBFM 3,5T(Vertical)	014598
UBFM 3,5T(Blank)	014599
UBFM 3,5T(Horizontally)	014600
UBFM 3,5T(Vertical)	014601
UTD-ZB	394006
YB 0,4×2,5	304001
E1008	241209
EN1508	241305

Terminal block with 3 connections
UJ6-2.5/1×2



us CE RoHS

60,4/5,2/35,2
11
800
24
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5/1×2	421463
TH35-7,5	102001
TH35-15	102005
UJ6-2.5/1×2G	422109
UJ5-1,5~4/1×2FG	422019
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2/ZB	422058
UJ5 5-25×12	422059
UJ6 5(Blank)	014001
UJ6 5(Horizontally)	014005
UJ6 5(Vertical)	014006
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
UTD-ZB	394006
YB 0,6×3,5	304002
E2508	241215

Terminal block with 3 connections
UJ6-4/1×2



us CE RoHS

68,4/6,2/35,2
13
800
32
4
0,2-6
0,2-4

Type	Order No
UJ6-4/1×2	421471
TH35-7,5	102001
TH35-15	102005
UJ6-4/1×2G	422112
UJ5-1,5~4/1×2FG	422019
PS-2	016022
UFBS 2-6	423011
UFBS 3-6	423012
UFBS 4-6	423013
UFBS 5-6	423014
UFBS 10-6	423015
UBFM 6(Blank)	424007
UBFM 6(Horizontally)	424008
UBFM 6(Vertical)	424009
UTD-ZB	394006
YB 0,6×3,5	304002
E4010	241254

UJ6 series push in terminal block

Knife disconnect terminal block
with test socket screw
UJ6-2.5SK



CE RoHS

Dissection type terminal block
UJ6-2.5FD



CE RoHS

Knife disconnect terminal block
with test socket screw
UJ6-4SK



UL US CE RoHS

Dimensions					
Width/Thickness/Height	(mm)	59,4/5,2/35,2		59,4/5,2/35,2	
Stripping length	(mm)	11		11	
Technical data					
Voltage	(V)	500		500	
Current	(A)	20		20	
Cross section	(mm ²)	2,5		2,5	
Connection capacity					
Solid conductors	(mm ²)	0,2-4		0,2-4	
Stranded conductors	(mm ²)	0,2-2,5		0,2-2,5	
Terminal block		Type	Order No	Type	Order No
		UJ6-2,5SK	421490	UJ6-2,5FD	421493

BU-Blue

Mounting rail

Can be installed on the rails



TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001
TH35-15	102005	TH35-15	102005	TH35-15	102005

End cover

For electrical isolation in the end of terminal blocks.



UJ6-2,5SKG	422114	UJ6-2,5SKG	422114	UJ6-4SKG	422124
------------	--------	------------	--------	----------	--------

Group end cover

For visual and electrical isolation in the terminal blocks



UJ5-1,5~4/1×2FG	422019	UJ5-1,5~4/1×2FG	422019		
-----------------	--------	-----------------	--------	--	--

Test accessories

Test plug, both used together, for circuit testing

PS-2	016022	PS-2	016022	PS-2	016022
------	--------	------	--------	------	--------

Push-in jumpers

Can be push into center of the terminal to achieve the terminals connection



2-pos	UFBS 2-5	423006	UFBS 2-5	423006	UFBS 2-5	423011
3-pos	UFBS 3-5	423007	UFBS 3-5	423007	UFBS 3-5	423012
4-pos	UFBS 4-5	423008	UFBS 4-5	423008	UFBS 4-5	423013
5-pos	UFBS 5-5	423009	UFBS 5-5	423009	UFBS 5-5	423014
10-pos	UFBS 10-5	423010	UFBS 10-5	423010	UFBS 10-5	423015
20-pos	UFBS 20-5	423028	UFBS 20-5	423028		
30-pos	UFBS 30-5	423029	UFBS 30-5	423029		

Marker support

Please refer to the attachment for the uses.



Marker strip

Horizontally/Vertically
Can be printed 1-600,
or the technical data
according to your
requirements.



Blank	UZB 5 (Blank)	014001	UZB 5 (Blank)	014001		
Horizontally	Centre UZB 5 (Horizontally)	014005	UZB 5 (Horizontally)	014005		
Vertically	UZB 5 (Vertical)	014006	UZB 5 (Vertical)	014006		
	UBFM 5 (Blank)	424004	UBFM 5 (Blank)	424004	UBFM 6 (Blank)	424007
	Sides UBFM 5 (Horizontally)	424005	UBFM 5 (Horizontally)	424005	UBFM 6 (Horizontally)	424008
	UBFM 5 (Vertical)	424006	UBFM 5 (Vertical)	424006	UBFM 6 (Vertical)	424009

Marker strip

Marker strip for the combination of terminals



Screwdriver



YB 0,6×3,5	304002	YB 0,6×3,5	304002	YB 0,6×3,5	304002
------------	--------	------------	--------	------------	--------


End socket



Insulated cord and terminal	E2508	241215	E2508	241215	E4010	241254
Bare cord end terminal						


UJ6 series push in terminal block

New

UPUN ELECTRIC D312

UJ6 series push in terminal block


Terminal block with 3 connections
UJ6-6/1 × 2



Terminal block with 3 connections
UJ6-10/1 × 2



Terminal block with 3 connections
UJ6-16/1 × 2



		US CE RoHS		US CE RoHS		US CE RoHS	
Dimensions							
Width/Thickness/Height (mm)		77/8,2/42,2		89 / 10,2 / 49,6		98 / 12,2 / 50,6	
Stripping length (mm)		16		17		22	
Technical data							
Voltage (V)		1000		1000		1000	
Current (A)		41		57		76	
Cross section (mm²)		6		10		16	
Connection capacity							
Solid conductors (mm²)		0,5-10		1,5-16		1,5-25	
Stranded conductors (mm²)		0,5-6		1,5-10		1,5-16	
Terminal block		Type	Order No	Type	Order No	Type	Order No
		UJ6-6/1 × 2	421505	UJ6-10/1 × 2	421512	UJ6-16/1 × 2	421516
BU:Blue							
Mounting rail							
Can be installed on the rails		TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001
		TH35-15	102005	TH35-15	102005	TH35-15	102005
End cover							
For electrical isolation in the end of terminal blocks.		UJ6-6/1 × 2G	422118	UJ6-10/1 × 2G	422121	UJ6-16/1 × 2G	422123
Group end cover							
For visual and electrical isolation in the terminal blocks		UJ5-6/1 × 2FG	422044				
Test accessories							
Test plug, both used together, for circuit testing		PS-2	016022	PS-2	016022	PS-2	016022
Push-in jumpers							
Can be push into center of the terminal to achieve the terminals connection		UFBS 2-8 3-pos 4-pos 5-pos 10-pos 20-pos 30-pos	423016 423017 423018 423019 423020	UFBS 2-10	423021	UFBS 2-12	423022
Marker support							
Please refer to the attachment for the uses.							
Marker strip							
Horizontally/Vertically Blank or the technical data according to your requirements.		U2B 8 (Blank)	014003	U2B 10 (Blank)	014004	U2B 10 (Blank)	014004
Horizontally 1 2 3 4 5 6 7		Centre U2B 8 (Horizontally)	014009	U2B 10 (Horizontally)	014011	U2B 10 (Horizontally)	014011
Vertically		U2B 8 (Vertical)	014010	U2B 10 (Vertical)	014012	U2B 10 (Vertical)	014012
		UBFM 8 (Blank)	424010	UBFM 8 (Blank)	424010	UBFM 8 (Blank)	424010
		Sides UBFM 8 (Horizontally)	424011	UBFM 8 (Horizontally)	424011	UBFM 8 (Horizontally)	424011
		UBFM 8 (Vertical)	424012	UBFM 8 (Vertical)	424012	UBFM 8 (Vertical)	424012
Marker strip							
Marker strip for the combination of terminals		UTD-ZB	394006	UTD-ZB	394006	UTD-ZB	394006
Screwdriver		YB 0,6×4,0	304003	YB 1,0×5,0	304004	YB 1,0×5,0	304004
End socket							
Insulated cord end terminal		E6012	241221	E10-12	241211	E16-18	241226
Bare cord end terminal							

Three-level terminal block
UJ6-2.5/3-3



CE RoHS

102,2/5,2/56,5
11
800
24
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5/3-3	421755
TH35-7,5	102001
TH35-15	102005
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UJ5 5-3	422060
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
YB 0,6 × 3,5	304002
E2508	241215

Double-level diode terminal block
UJ6-2.5/2-2D




CE RoHS

67,6 / 5,2 / 45,8
11
800
24
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5/2-2D	421787
TH35-7,5	102001
TH35-15	102005
UJ6-2.5/2-2G	422111
UJ5-1,5 ~ 4/2-2FG	422020
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
YB 0,6 × 3,5	304002
E2508	241215

Knife disconnect terminal block
with testsocket screw and 4 connections
UJ6-2.5/1 × 2SK



CE RoHS

71,2/5,2/35,2
11
500
20
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5/1×2SK	421491
TH35-7,5	102001
TH35-15	102005
UJ6-2.5/1×2SKG	422125
UJ5-1,5 ~ 4/2 × 2FG	422018
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ6-2.5/1×2SKG	422125
UJ5-1,5 ~ 4/2 × 2FG	422018
UBFM 5(Blank)	014001
UBFM 5(Horizontally)	014005
UBFM 5(Vertical)	014006
UTD-ZB	394006
YB 0,6 × 3,5	304002
E2508	241215

Knife disconnect terminal block
with testsocket screw and 4 connections
UJ6-2.5/2 × 2SK



CE RoHS

84/5,2/35,2
11
500
20
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5/2×2SK	421492
TH35-7,5	102001
TH35-15	102005
UJ6-2.5/2×2SKG	422126
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ6-2.5/2×2SKG	422126
UBFM 5(Blank)	014001
UBFM 5(Horizontally)	014005
UBFM 5(Vertical)	014006
UTD-ZB	394006
YB 0,6 × 3,5	304002
E2508	241215

UJ6 series push in terminal block

Terminal block with 4 connections
UJ6-1.5/2-2



Double-level terminal block
UJ6-2.5/2-2




Double-level terminal block
UJ6-4/2-2



CE RoHS		UL US CE RoHS		UL US CE RoHS	
Dimensions					
Width/Thickness/Height	(mm)	65,8 / 3,5 / 41,1		67,6 / 5,2 / 45,8	
Stripping length	(mm)	11		13	
Technical data					
Voltage	(V)	500		800	
Current	(A)	16		24	
Cross section	(mm²)	1,5		2,5	
Connection capacity					
Solid conductors	(mm²)			0,2-4	
Stranded conductors	(mm²)	0,2-1,5		0,2-2,5	
Terminal block		Type	Order No	Type	Order No
		UJ6-1,5/2-2	421488	UJ6-2,5/2-2	421467
Mounting rail					
Can be installed on the 	TH35-7,5	102001	TH35-7,5	102001	TH35-7,5
	TH35-15	102005	TH35-15	102005	TH35-15
End cover					
For electrical isolation in the end of terminal blocks. 	UJ6-1,5/2-2G	422160	UJ6-2,5/2-2G	422111	UJ6-4/2-2G
Group end cover					
For visual and electrical isolation in the terminal blocks 			UJ5-1,5 ~ 4/2-2FG	422020	UJ5-1,5 ~ 4/2-2FG
Test accessories					
Test plug, both used together, for circuit testing	PS-2	016022	PS-2	016022	PS-2
Push-in jumpers					
Can be push into center of the terminal to achieve the terminals' connection 	2-pos	UFBS 2-3,5	423050	UFBS 2-5	423006
	3-pos	UFBS 3-3,5	423051	UFBS 3-5	423007
	4-pos	UFBS 4-3,5	423052	UFBS 4-5	423008
	5-pos	UFBS 5-3,5	423053	UFBS 5-5	423009
	10-pos	UFBS 10-3,5	423049	UFBS 10-5	423010
	20-pos			UFBS 20-5	423028
	30-pos			UFBS 30-5	423029
Marker support					
Please refer to the attachment for the uses. 			UJ5 5-2	422009	
			UJ5 5-2/S	422057	
Marker strip					
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements. 	Blank	Centre			
	Horizontally				
	Vertically				
	UBFM 3,5T (Blank)	014599	UBFM 5 (Blank)	424004	UBFM 6 (Blank)
	Sides UBFM 3,5T (Horizontally)	014600	UBFM 5 (Horizontally)	424005	UBFM 6 (Horizontally)
	UBFM 3,5T (Vertical)	014601	UBFM 5 (Vertical)	424006	UBFM 6 (Vertical)
Marker strip					
Marker strip for the combination of terminals 				UTD-ZB	394006
Screwdriver					
	YB 0, 4 × 2, 5	304001	YB 0,6 × 3,5	304002	YB 0,6 × 3,5
End socket					
Insulated cord end terminal 	E1008	241209	E2508	241215	E4010
	EN1508	241305			241254

UJ6 series push in terminal block

Ground terminal block
with 4 connections
UJ6-1.5/2×2JD



CE RoHS

UPUN ELECTRIC D316


UJ6 series push in terminal block

Ground terminal block
with 3 connections
UJ6-1.5/1 × 2JD



Ground terminal block
with 3 connections
UJ6-2.5/1 × 2JD

Ground terminal block
with 3 connections
UJ6-4/1 × 2JD



US CE RoHS

US CE RoHS

US CE RoHS

Dimensions	
Width/Thickness/Height	(mm)
Stripping length	(mm)
Technical data	
Voltage	(V)
Current	(A)
Cross section	(mm ²)
Connection capacity	
Solid conductors	(mm ²)
Stranded conductors	(mm ²)
Terminal block	
Mounting rail	
Can be installed on the rail	
End cover	
For electrical isolation in the end of terminal blocks.	
Test accessories	
Test plug, both used together, for circuit testing	
Push-in jumpers	
Can be push into center of the terminal to achieve the terminals connection	
Marker strip	
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements.	
Blank	
Horizontally	
Vertically	
Marker strip	
Marker strip for the combination of terminals	
Screwdriver	
End socket	
Insulated cord end terminal	
Bare cord end terminal	

Type	Order No	Type	Order No	Type	Order No
UJ6-1.5/1 × 2JD	421485	UJ6-2.5/1 × 2JD	421484	UJ6-4/1 × 2JD	421472
Type		Type		Type	
TH35-7.5	102001	TH35-7.5	102001	TH35-7.5	102001
TH35-15	102005	TH35-15	102005	TH35-15	102005
UJ6-1.5/1 × 2G	422164	UJ6-2.5/1 × 2G	422109	UJ6-4/1 × 2G	422112
PS-2	016022				
UFBS 2-3,5	423050	UFBS 2-5	423006	UFBS 2-6	423011
UFBS 3-3,5	423051	UFBS 3-5	423007	UFBS 3-6	423012
UFBS 4-3,5	423052	UFBS 4-5	423008	UFBS 4-6	423013
UFBS 5-3,5	423053	UFBS 5-5	423009	UFBS 5-6	423014
UFBS 10-3,5	423049	UFBS 10-5	423010	UFBS 10-6	423015
		UFBS 20-5	423028		
		UFBS 30-5	423029		
UZB3,5T (Blank)	014593	UZB 5 (Blank)	014001	UZB 6 (Blank)	014002
Centre UZB3,5T (Horizontally)	014597	UZB 5 (Horizontally)	014005	UZB 6 (Horizontally)	014007
UZB3,5T (Vertical)	014598	UZB 5 (Vertical)	014006	UZB 6 (Vertical)	014008
UBFM 3,5T (Blank)	014599	UBFM 5 (Blank)	424004	UBFM 6 (Blank)	424007
Sides UBFM 3,5T (Horizontally)	014600	UBFM 5 (Horizontally)	424005	UBFM 6 (Horizontally)	424008
UBFM 3,5T (Vertical)	014601	UBFM 5 (Vertical)	424006	UBFM 6 (Vertical)	424009
UTD-ZB	394006	UTD-ZB	394006	UTD-ZB	394006
YB 0,4 × 2,5	304001	YB 0,6 × 3,5	304002	YB 0,6 × 3,5	304002
E1008	241209	E2508	241215	E4010	241254
EN1508	241305				

UJ6 series push in terminal block

Double-level ground
terminal block

UJ6-1.5/2-2JD



CE RoHS

65,8 / 3,5 / 41,1


1,5

0,2-1,5

Type	Order No
UJ6-1.5/2-2JD	421489
TH35-7,5	102001
TH35-15	102005
UJ5-1.5/2-2G	422167
PS-2	016022
UFBS 2-3,5	423050
UFBS 3-3,5	423051
UFBS 4-3,5	423052
UFBS 5-3,5	423053
UFBS 10-3,5	423049
UBFM 3,5T(Blank)	014599
UBFM 3,5T(Horizontally)	014600
UBFM 3,5T(Vertical)	014601
UTD-ZB	394006
YB 0,4 × 2,5	304001
E1008	241209
EN1508	241305

Double-level ground
terminal block

UJ6-2.5/2-2JD



US CE RoHS

67,6 / 5,2 / 45,8

11

2,5


0,2-4

0,2-2,5

Type	Order No
UJ6-2.5/2-2JD	421488
TH35-7,5	102001
TH35-15	102005
UJ6-2.5/2-2G	422111
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
UTD-ZB	394006
YB 0,6 × 3,5	304002
E2508	241215

Double-level ground
terminal block

UJ6-4/2-2JD



US CE RoHS

83,6/6,2/45,8

13

4


0,2-6

0,2-4

Type	Order No
UJ6-4/2-2JD	421497
TH35-7,5	102001
TH35-15	102005
UJ6-4/2-2G	422116
UFBS 2-6	423011
UFBS 3-6	423012
UFBS 4-6	423013
UFBS 5-6	423014
UFBS 10-6	423015
UJ5 5-2	422009
UJ5 5-2/S	422057
UBFM 6(Blank)	424007
UBFM 6(Horizontally)	424008
UBFM 6(Vertical)	424009
UTD-ZB	394006
YB 0,6 × 3,5	304002
E4010	241254

Three-level ground
terminal block

UJ6-2.5/3-3JD



CE RoHS

99, 5/5,2/56,5

11

2,5


0,2-4

0,2-2,5

Type	Order No
UJ6-2.5/3-3JD	421763
TH35-7,5	102001
TH35-15	102005
UJ6-2.5/3-3G	422161
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UJ5 5-3	422060
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
UTD-ZB	394006
YB 0,6 × 3,5	304002
E2508	241215

UJ6 series push in terminal block

Ground terminal block
with 4 connections
UJ6-2.5/2 × 2JD



Ground terminal block
with 4 connections
UJ6-4/2 × 2JD



Ground terminal block
with 4 connections
UJ6-6/2 × 2JD



Dimensions		UL US CE RoHS		UL US CE RoHS		UL US CE RoHS		
Width/Thickness/Height	(mm)	72.2 / 5.2 / 35.2		81.8/6.2/35.2		94/8.2/42.2		
Stripping length	(mm)	11		13		16		
Technical data								
Voltage	(V)							
Current	(A)							
Cross section	(mm ²)	2,5		4		6		
Connection capacity								
Solid conductors	(mm ²)	0,2-4		0,2-6		0,5-10		
Stranded conductors	(mm ²)	0,2-2,5		0,2-4		0,5-6		
Terminal block		Type	Order No	Type	Order No	Type	Order No	
		UJ6-2,5/2×2JD	421466	UJ6-4/2×2JD	421474	UJ6-6/2×2JD	421508	
Mounting rail								
Can be installed on the rails		TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001	
		TH35-15	102005	TH35-15	102005	TH35-15	102005	
End cover								
For electrical isolation in the end of terminal blocks,		UJ6-2,5/2×2G	422110	UJ6-4/2×2G	422113	UJ6-6/2×2G	422119	
Group end cover								
For visual and electrical isolation in the terminal blocks								
Test accessories								
Test plug, both used together, for circuit testing								
Push-in jumpers								
Can be push into center of the terminal to achieve the terminals connection		2-pos UFBS 2-5	423006	UFBS 2-6	423011			
		3-pos UFBS 3-5	423007	UFBS 3-6	423012			
		4-pos UFBS 4-5	423008	UFBS 4-6	423013			
		5-pos UFBS 5-5	423009	UFBS 5-6	423014			
		10-pos UFBS 10-5	423010	UFBS 10-6	423015			
		20-pos UFBS 20-5	423028					
		30-pos UFBS 30-5	423029					
Marker support								
Please refer to the attachment for the uses,								
Marker strip								
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements,		Blank	UZB 5 (Blank)	014001	UZB 6 (Blank)	014002	UZB 8 (Blank)	014003
		Horizontally	Centre UZB 5 (Horizontally)	014005	UZB 6 (Horizontally)	014007	UZB 8 (Horizontally)	014009
		Vertically	UZB 5 (Vertical)	014006	UZB 6 (Vertical)	014008	UZB 8 (Vertical)	014010
			UBFM 5 (Blank)	424004	UBFM 6 (Blank)	424007	UBFM 8 (Blank)	424010
			Sides UBFM 5 (Horizontally)	424005	UBFM 6 (Horizontally)	424008	UBFM 8 (Horizontally)	424011
			UBFM 5 (Vertical)	424006	UBFM 6 (Vertical)	424009	UBFM 8 (Vertical)	424012
Marker strip								
Marker strip for the combination of terminals		UTD-ZB	394006	UTD-ZB	394006	UTD-ZB	394006	
Screwdriver		YB 0,6×3,5	304002	YB 0,6×3,5	304002	YB 0,6×4,0	304003	
End socket								
Insulated cord end terminal		E2508	241215	E4010	241254	E6012	241212	
Bare cord end terminal								

Three-level terminal block
UJ6-2.5JD/L/L




CE RoHS

99, 5/5,2/56,5
11
800
24(当连接截面为4 mm²的导线时)
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5JD/L/L	421764
TH35-7,5	102001
TH35-15	102005
UJ6-2,5/3-3G	422161
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-6	423010
UFBS 20-6	423028
UFBS 30-6	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UJ5 5-3	422060
UZB 5(Blank)	014001
UZB 5(Horizontally)	014005
UZB 5(Vertical)	014006
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
UTD-ZB	394006
YB 0,6×3,5	304002
E2508	241215

Three-level terminal block
UJ6-2.5JD/L/N



CE RoHS

99, 5/5,2/56,5
11
800
24(当连接截面为4 mm²的导线时)
2,5
0,2-4
0,2-2,5

Type	Order No
UJ6-2.5JD/L/N	421765
TH35-7,5	102001
TH35-15	102005
UJ6-2,5/3-3G	422161
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UJ5 5-3	422060
UZB 5(Blank)	014001
UZB 5(Horizontally)	014005
UZB 5(Vertical)	014006
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
UTD-ZB	394006
YB 0,6×3,5	304002
E2508	241215

Four-level motor terminal block
UJ6-2.5JD/3L



CE RoHS

99,5/5,2/91,1
11
800
2,5
4
0,2-2,5

Type	Order No
UJ6-2.5JD/3L	421754
TH35-7,5	102001
TH35-15	102005
UJ6-2,5JD/3LG	422159
PS-2	016022
UFBS 2-5	423006
UFBS 3-5	423007
UFBS 4-5	423008
UFBS 5-5	423009
UFBS 10-5	423010
UFBS 20-5	423028
UFBS 30-5	423029
UJ5 5-2	422009
UJ5 5-2/S	422057
UJ5 5-3	422060
UZB 5(Blank)	014001
UZB 5(Horizontally)	014005
UZB 5(Vertical)	014006
UBFM 5(Blank)	424004
UBFM 5(Horizontally)	424005
UBFM 5(Vertical)	424006
UTD-ZB	394006
YB 0,6×3,5	304002
E2508	241215

Fuse terminal block
UJ6-4RD (5×20)



CE RoHS

59/6,2/63,5
13
500
6,3
4
0,2-6
0,2-4

Type	Order No
UJ6-4RD (5×20)	421502
TH35-7,5	102001
TH35-15	102005
UJ6-4RD (5×20)G	422115
PS-2	016022
UFBS 2-6	423011
UFBS 3-6	423012
UFBS 4-6	423013
UFBS 5-6	423014
UFBS 10-6	423015
UZB 6(Blank)	014002
UZB 6(Horizontally)	014007
UZB 6(Vertical)	014008
UBFM 6(Blank)	424007
UBFM 6(Horizontally)	424008
UBFM 6(Vertical)	424009
UTD-ZB	394006
5×20	015001
YB 0,6×3,5	304002
E4010	241254

UJ6 series push in terminal block

Double-level terminal block,
internally connected
UJ6-2.5/2 × 2-PV



CE RoHS

Double-level terminal block,
internally connected
UJ6-4/2 × 2-PV



CE RoHS


Three-level terminal block,
internally connected
UJ6-2.5/3 × 3-PV



CE RoHS

Dimensions		CE RoHS		CE RoHS		CE RoHS	
Width/Thickness/Height	(mm)	67,6 / 5,2 / 45,8		83,6/6,2/45,8		102,2/5,2/56,5	
Stripping length	(mm)	11		13		11	
Technical data							
Voltage	(V)	800		800		800	
Current	(A)	24		32		24	
Cross section	(mm ²)	2,5		4		2,5	
Connection capacity							
Solid conductors	(mm ²)	0,2-4		0,2-6		0,2-4	
Stranded conductors	(mm ²)	0,2-2,5		0,2-4		0,2-2,5	
Terminal block		Type	Order No	Type	Order No	Type	Order No
		UJ6-2,5/2×2-PV	421543	UJ6-4/2×2-PV	421542	UJ6-2,5/3×3-PV	421750
Mounting rail							
Can be installed on the rails 		TH35-7,5	102001	TH35-7,5	102001	TH35-7,5	102001
		TH35-15	102005	TH35-15	102005	TH35-15	102005
End cover							
For electrical isolation in the end of terminal blocks. 		UJ6-2,5/2-2G	422111	UJ6-4/2-2G	422116	UJ6-2,5/3-3G	422161
Group end cover							
For visual and electrical isolation in the terminal blocks. 		UJ5-1,5~4/2-2FG	422020	UJ5-1,5~4/2-2FG	422020		
Test accessories							
Test plug, both used together, for circuit testing		PS-2	016022	PS-2	016022	PS-2	016022
Push-in jumpers							
Can be push into center of the terminal to achieve the terminals connection. 	2-pos	UFBS 2-5	423006	UFBS 2-6	423011	UFBS 2-5	423006
	3-pos	UFBS 3-5	423007	UFBS 3-6	423012	UFBS 3-5	423007
	4-pos	UFBS 4-5	423008	UFBS 4-6	423013	UFBS 4-5	423008
	5-pos	UFBS 5-5	423009	UFBS 5-6	423014	UFBS 5-5	423009
	10-pos	UFBS 10-5	423010	UFBS 10-6	423015	UFBS 10-5	423010
	20-pos	UFBS 20-5	423028			UFBS 20-5	423028
	30-pos	UFBS 30-5	423029			UFBS 30-5	423029
Marker support							
Please refer to the attachment for the uses. 		UJ5 5-2	422009			UJ5 5-2	422009
		UJ5 5-2/S	422057			UJ5 5-2/S	422057
Marker strip							
Horizontally/Vertically Can be printed 1-400, or the technical data according to your requirements. 							
		Sides					
		UBFM 5 (Blank)	424004	UBFM 6 (Blank)	424007	UBFM 5 (Blank)	424004
		UBFM 5 (Horizontally)	424005	UBFM 6 (Horizontally)	424008	UBFM 5 (Horizontally)	424005
		UBFM 5 (Vertical)	424006	UBFM 6 (Vertical)	424009	UBFM 5 (Vertical)	424006
Marker strip							
Marker strip for the combination of terminals 				UTD-ZB		394006	
Fusible core							
Fuse protection 							
Screwdriver							
		YB 0,6×3,5	304002	YB 0,6×3,5	304002	YB 0,6×3,5	304002
End socket							
Insulated cord end terminal 		E2508	241215	E4010	241254	E2508	241215

UJ6 series push in terminal block




UJ6 series push in terminal block

Double-level terminal block with 3 connections
UJ6-2.5/2 × 1/2-2



Test terminal block
UJ6-6S




Terminal blocks with needle connection
UJ6-2.5V



	CE RoHS		e RoHS CE RoHS		CE RoHS
Dimensions					
Width/Thickness/Height (mm)	114,2/5,2/63,8		90/8,2/42,2		48,5/5,2/35,2
Stripping length (mm)	11		16		11
Technical data					
Voltage (V)	800		500		800
Current (A)	22		41		24(当导线截面积为4 mm²的导线时)
Cross section (mm²)	2.5		6		2.5
Connection capacity					
Solid conductors (mm²)	0.2-4		0.5-10		0.2-4
Stranded conductors (mm²)	0.2-2.5		0.5-6		0.2-2.5
Terminal block	Type Order No	Type Order No	Type Order No	Type Order No	Type Order No
	UJ6-2.5/2×1/2-2 421728	UJ6-6S 421509	UJ6-2.5V 421736		
BU-Blue					
Mounting rail					
Can be installed on the rails	TH35-7.5 102001	TH35-7.5 102001	TH35-7.5 102001		
	TH35-15 102005	TH35-15 102005	TH35-15 102005		
End cover					
For electrical isolation in the end of terminal blocks.	UJ6-2.5/2×1/2-2G 422152	UJ6-6SG 422117	UJ6-2.5VG 422154		
Group end cover					
For visual and electrical isolation in the terminal blocks			UJ5-1.5~4FG 422016		
Test accessories					
Test plug, both used together, for circuit testing	PS-2 016022	PS-2 016022	PS-2 016022		
Push-in jumpers		PS-4 订货数据详见附件			
Can be pushed into center of the terminal to achieve the terminals connection	UFBS 2-5 423006	UFBS 2-8 423016	UFBS 2-5 423006		
	UFBS 3-5 423007	UFBS 3-8 423017	UFBS 3-5 423007		
	UFBS 4-5 423008	UFBS 4-8 423018	UFBS 4-5 423008		
	UFBS 5-5 423009	UFBS 5-8 423019	UFBS 5-5 423009		
	UFBS 10-5 423010	UFBS 10-8 423020	UFBS 10-5 423010		
	UFBS 20-5 423028		UFBS 20-5 423028		
	UFBS 30-5 423029		UFBS 30-5 423029		
Marker support					
Please refer to the attachment for the uses.	UJ5 5-2/ZB 2pcs UZB5 marker strip can be installed 422058		UJ5 5-2/ZB 3pcs UZB5 marker strip can be installed 422058		
	UJ5 5-25 × 12 422059		UJ5 5-25 × 12 422059		
Marker strip					
Horizontally/Vertically Can be printed 1~600, or the technical data according to your requirements.	Blank 014001	UBFM 8 (Blank) 424010	UBFM 8 (Blank) 424010		
Horizontally 1 2 3 4 5 6 7	Centre UZB 5 (Horizontally) 014005	UBFM 8 (Horizontally) 424011	UBFM 8 (Horizontally) 424011		
Vertically 1 2 3 4 5 6 7	UBFM 5 (Blank) 424004	UBFM 8 (Vertical) 424012	UBFM 8 (Vertical) 424012		
	Sides UBFM 5 (Horizontally) 424005				
	UBFM 5 (Vertical) 424006				
Marker strip					
Marker strip for the combination of terminals	UTD-ZB 394006	UTD-ZB 394006	UTD-ZB 394006		
Screwdriver	YB 0.6 × 3.5 304002	YB 0.6 × 4.0 304003	YB 0.6 × 3.5 304002		
End socket					
Insulated cord end terminal	E2508 241215	E6012 241212	E2508 241215		

Vehicle fuse terminal block
UJ6-2.5CW/RD



CE RoHS

Dimensions		
Width/Thickness/Height	(mm)	65/5.2/35.2
Stripping length	(mm)	11
Technical data		
Voltage	(V)	400
Current	(A)	10
Cross section	(mm ²)	2.5
Connection capacity		
Solid conductors	(mm ²)	4
Stranded conductors	(mm ²)	0.2-2.5
Terminal block	Type	Order No
	UJ6-2.5CW/RD	421786
Mounting rail		
Can be installed on the rails	TH35-7.5	102001
	TH35-15	102005
End cover		
For electrical isolation in the end of terminal blocks.	UJ6-2.5CWG	422170
Push-in jumpers		
Can be push into center of the terminal to achieve the terminals connection	2-pos	UFBS 2-5 423006
	3-pos	UFBS 3-5 423007
	4-pos	UFBS 4-5 423008
	5-pos	UFBS 5-5 423009
	10-pos	UFBS 10-5 423010
		UFBS 20-5 423028
		UFBS 30-5 423029
Marker support		
Please refer to the attachment for the uses.	UJ5 5-2	422009
	UJ5 5-2/S	422057
Marker strip		
Horizontally/Vertically Can be printed 1-400, or the technical data according to your requirements.	Blank	
	Horizontally 1 2 3 4 5 6 7	
	Vertically	
	UBFM 5(Blank)	424004
	UBFM 5(Horizontally)	424005
	UBFM 5(Vertically)	424006
Screwdriver		
	YB 0.6×3.5	304002

UJ6 series push in terminal block

Terminal block
UJ6V-2.5



CE RoHS

Dimensions			
Width/Thickness/Height	(mm)	50, 8/5,2/35,2	
Stripping length	(mm)	11	
Technical data			
Voltage	(V)	1000	
Current	(A)	24	
Cross section	(mm ²)	2.5	
Connection capacity			
Solid conductors	(mm ²)	0,2-4	
Stranded conductors	(mm ²)	0,2-2,5	
Terminal block	Type	Order No	
	UJ6V-2,5	421776	
Mounting rail			
Can be installed on the rails		TH35-7,5	102001
		TH35-15	102005
End cover			
For electrical isolation in the end of terminal blocks.		UJ6V-2,5 - 4G	422166
Group end cover			
For visual and electrical isolation in the terminal blocks		UJ5-1,5 - 4FG	422016
Test accessories			
Test plug, both used together, for circuit testing		PS-2	016022
Push-in jumpers			
Can be push into center of the terminal to achieve the terminals connection		2-pos UFBS 2-5	423006
		3-pos UFBS 3-5	423007
		4-pos UFBS 4-5	423008
		5-pos UFBS 5-5	423009
		10-pos UFBS 10-5	423010
		UFBS 20-5	423028
		UFBS 30-5	423029
Marker strip			
Horizontally/Vertically Can be printed 1-400, or the technical data according to your requirements.		Blank UZB 5 (Blank)	014001
		Horizontally 1 2 3 4 5 6 7 UZB 5 (Horizontally)	014005
		Vertically 1 2 3 4 5 6 7 UZB 5 (Vertical)	014006
		JB 5 (Blank)	024001
		JB 5 (Horizontally)	024002
		JB 5 (Vertical)	024003
Screwdriver			
		YB 0,6 x 3,5	304002
End socket			
Insulated cord end terminal		E2508	241215

Plug
UJ6-2.5VP/L



New Plug
UJ6-2.5VP/M




New Plug
UJ6-2.5VP/R



Dimensions					
Width/Thickness/Height	(mm)	16 / 5,2 / 39,5		16 / 5,2 / 39,5	
Technical data					
Voltage	(V)	500		500	
Current	(A)	24 (connect conductors of 4 mm² cross section)		24 (connect conductors of 4 mm² cross section)	
Cross section	(mm²)	2,5		2,5	
Connection capacity					
Solid conductors	(mm²)	0,2-4		0,2-4	
Stranded conductors	(mm²)	0,2-2,5		0,2-2,5	
Terminal block		Type	Order No	Type	Order No
		UJ6-2.5VP/L	016029	UJ6-2.5VP/M	016030
				UJ6-2.5VP/R	016031

Marker strip					
Horizontally/Vertically Can be printed 1-600, or the technical data according to your requirements,	Blank	UBFM 5(Blank)	424004	UBFM 5(Blank)	424004
	Horizontally	UBFM 5(Horizontally)	424005	UBFM 5(Horizontally)	424005
	Vertically	UBFM 5(Vertically)	424006	UBFM 5(Vertically)	424006
Screwdriver		YB 0,6×3,5	304002	YB 0,6×3,5	304002

structures of 3 positions plug

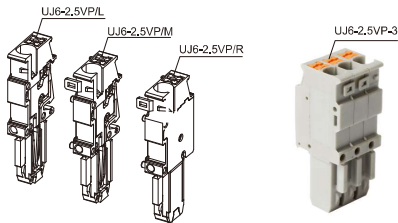


UJ6 series push in terminal block


UJ6 series plug



Type	Order No
UJ6-2.5VP-1	016032
UJ6-2.5VP-2	016033
UJ6-2.5VP-3	016034
UJ6-2.5VP-4	016035
UJ6-2.5VP-5	016036
UJ6-2.5VP-6	016037
UJ6-2.5VP-7	016038
UJ6-2.5VP-8	016039
UJ6-2.5VP-9	016040
UJ6-2.5VP-10	016041
UJ6-2.5VP-11	016042
UJ6-2.5VP-12	016043
UJ6-2.5VP-13	016044
UJ6-2.5VP-14	016045
UJ6-2.5VP-15	016046
UJ6-2.5VP-16	016047
UJ6-2.5VP-17	016048
UJ6-2.5VP-18	016049
UJ6-2.5VP-19	016050
UJ6-2.5VP-20	016051



Installation diagram of UJ6 series end socket



When there are too many combinations, intermediate clamping feet can be properly removed



SHANGHAI UPUN ELECTRIC GROUP

Add: NO.528, Jiye Rd., Sheshan Industry
Area, Songjiang District, Shanghai
Tel: +86-21-3779 5555
www.chinaupun.net